




TRASPARENT OUTDOOR LEDWALL

100 x 50

FEATURES:

- » PIXEL PITCH: 3.91 HORIZONTAL
7.81 VERTICAL
- » RESOLUTION: 128X64 / 256X64
- » BRIGHTNESS: 6.500 CD / M2
- » CONNECTIONS: DVI, LAN, WIFI, 4G
- » REMOTE MANAGEMENT

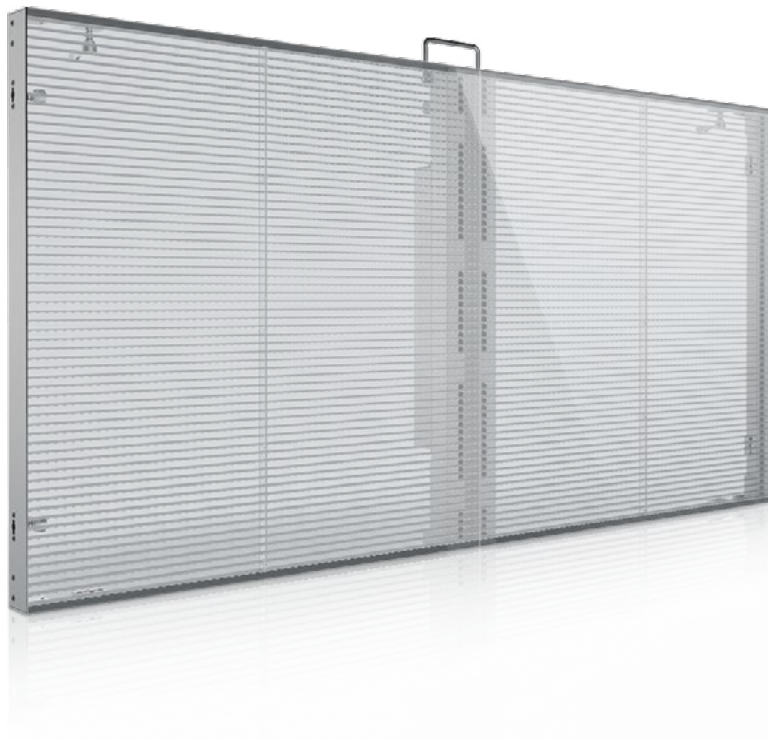



TRASPARENT OUTDOOR LEDWALL

100 x 50

TECHNICAL DATA:

3,91 pixel pitch horizontal – 7,82 pixel pitch vertical

• Resolution	256x64 px
• Module Dimension	1000 mm – 500 mm
• Visible surfaces	Double-sided
• Led Type	RGB (Full color)
• Brightness	5500 cd/m2
• Display distance	5 – 100
• Trasparency	0.8 N/A
• Maintenance	Rear
• Weight	7,5 Kg.
• Thickness	8.5 cm
• Refresh	≥1920 Hz
• Viewing angle	120°
• Grayscale	14 bit
• Life time	100.000 h

Management

• Interfaces	Ethernet, Wifi, LTE
• Software	Windows/Android App/Web App

Power

• Power supply	240 W/m ²
• Max power consumption	800 W/m ²
• Voltage	AC90~264

Instructions

• Operating temperature	-4F ~ 140F/-20C ~ +60
• Storage temperature	-4 ~ 140°F/-20°C ~ +60°C
• Humidity relative	10% ~ 85%

Control

• Remote	Video Synchronization
----------	-----------------------

NOTES: Any updates may cause revisions to this datasheet, the manufacturer reserves the right to modify it in whole or in part.

